
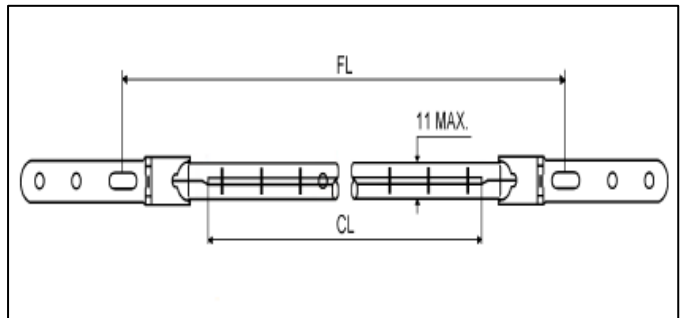


## CLIENT'S PRODUCT REQUEST

### COMPANY DETAILS:

Company name: \_\_\_\_\_  
Activity: \_\_\_\_\_  
Country: \_\_\_\_\_  
Web Site: \_\_\_\_\_

Contact name: \_\_\_\_\_  
Phone: \_\_\_\_\_  
Fax: \_\_\_\_\_  
Email: \_\_\_\_\_

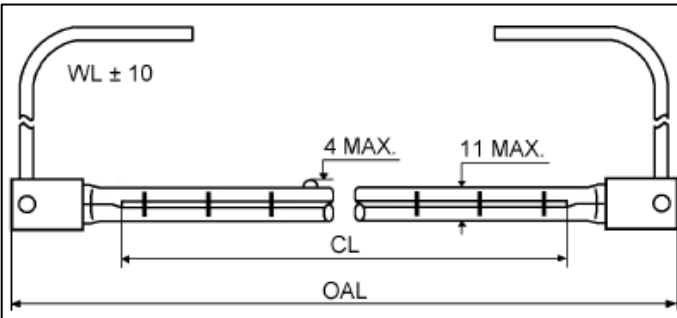

### LAMP SPECIFICATIONS\*:

\*please refer to brochure "Technical description"

**Voltage:** \_\_\_\_\_ V      **Power:** \_\_\_\_\_ W      **Filament Temperature:** \_\_\_\_\_ Kelvin

**Burning Position:**    Horizontal       Universal

**Lamp Type:**

JHS <input type="checkbox"/>	JHB <input type="checkbox"/>	JHM <input type="checkbox"/>	JHDS <input type="checkbox"/>	JHDMS <input type="checkbox"/>
JHC <input type="checkbox"/>	JHA <input type="checkbox"/>	JHMC <input type="checkbox"/>	JHDSC <input type="checkbox"/>	JHDMSC <input type="checkbox"/>
JHT <input type="checkbox"/>	JHL <input type="checkbox"/>	JHML <input type="checkbox"/>	JHDA <input type="checkbox"/>	JHDMA <input type="checkbox"/>
	JHLC <input type="checkbox"/>		JHDL <input type="checkbox"/>	JHDML <input type="checkbox"/>

#### Dimensions:

OAL: \_\_\_\_\_ mm  
FL: \_\_\_\_\_ mm  
CL: \_\_\_\_\_ mm  
WL: \_\_\_\_\_ mm

#### Cables Terminal (if cables required):

Striped:       Faston Male:   
Splice:       Faston Female:   
Fork M5:   
Ring M4:

Cable insulation sleeve:    Yes       No

#### Base Types:

B <input type="checkbox"/>	Jc <input type="checkbox"/>	T <input type="checkbox"/>
B splashproof <input type="checkbox"/>	Rs <input type="checkbox"/>	Gw <input type="checkbox"/>
Bf <input type="checkbox"/>	N <input type="checkbox"/>	Gs <input type="checkbox"/>
J <input type="checkbox"/>	Ns <input type="checkbox"/>	Magic Fit i <input type="checkbox"/>

#### Base Types jacketed lamps:

B <input type="checkbox"/>
Bj <input type="checkbox"/>
V <input type="checkbox"/>
Vj <input type="checkbox"/>
Magic Fit id <input type="checkbox"/>

**Packaging:**    Standard       Individual

### USEFUL INFORMATIONS:

Application or system: \_\_\_\_\_      Lamps annual consumption: \_\_\_\_\_ Pcs  
Voltage, dimming during operation: \_\_\_\_\_% to \_\_\_\_\_%      Quantity per delivery: \_\_\_\_\_ Pcs  
Shock, vibration, acceleration:      Yes       No   
Cooling system on sealing part:      Yes       No

### COMMENTS: